


This package includes:

- One SA-02 unit.
- One switching power supply adaptor.
- One 3.5mm phone-jack to 2-RCA audio adaptor cable.
- D-Sub x 3 RCA cable.
- User manual.

Features:

- * Let you watch new HDMI source signal (from Set Top Box, or DVD player) on your older analog TVs or monitor.
- * Output YPbPr/RGB switchable.
- * Plug and Play, easy to install.
- * Can operate without external DC power supply.
This unit can be powered by the HDMI video source through Pin 18 of the HDMI connector.
However it is recommended to use external power adaptor to ensure enough power is provided to the unit.

Operation Controls and Functions:

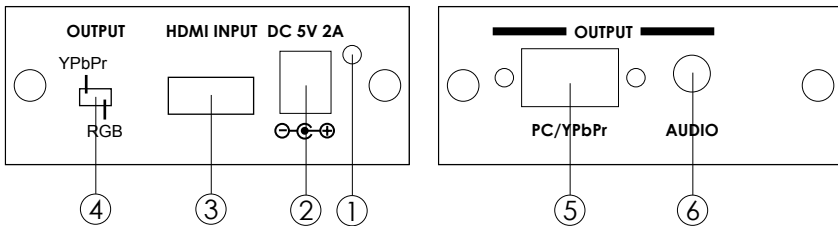


1. Power LED.
2. DC 5V power input jack.
3. HDMI input connector: Connects to HDMI output connector of your HDMI source equipment.
4. Output format switch:
 - Set the switch to YPbPr when the output of the unit is connected to your display TV through 3 RCA component input. (Using VGA to 3 RCA adaptor cable)
 - Set the switch to RGB when the output of the unit is connected to your display TV through HD-15 D-sub PC input.
5. HD-15 D-sub output : Connects to the input of your display TV through VGA cable, or D-sub to 3 RCA adaptor cable.
6. Stereo audio output via 3.5mm phone jack.

Specification

- * HDMI is compliant with HDMI 1.0
- * PC Output : HD-15 (RGBHV/YPbPr)
- * Analog Audio Output : Analog L.R stereo
- * Operation frequency : up to 165MHz
- * Input/Output resolution :
 - PC : VGA@60、VGA@72、VGA@75、VGA@85
SVGA@60、SVGA@72、SVGA@75、SVGA@85
XGA@60、XGA@70、XGA@75、XGA@85、XGAi@87
SXGA@60、SXGA@75、SXGA@85、UXGA@60
1152@70、1152@75、1152@85
 - HD : 480i@60、576i@50、480P@60、576P@50、720P@60、
720P@50、1080i@60、1080i@50、1080P@60、
1080P@50、1080P@30、1080P@25、1080P@24
- * Using switch to select output Format between RGB and YPbPr
- * Dimensions (WxHxD) : 76 * 30 * 105mm
- * Power : 5V Center-positive

Installation

Connection 1 (RGB out)

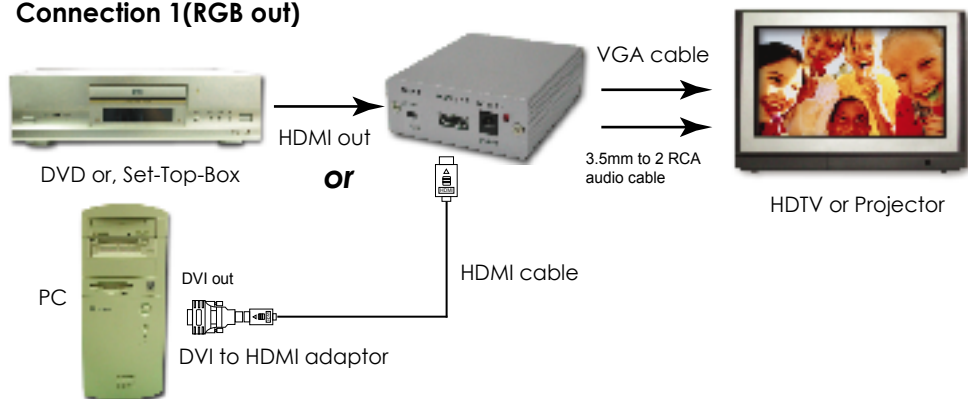

Connection 2 (YPbPr out)

