Introduction:

The HDMI Signal Transmit unit sits next to your HDMI source. |Connect your HDMI source to the send unit. The powerful single | cat.6 HDMI Extender and transmission distance up to 50M.

Features

- * Compact size transmitter and receiver.
- * Connection between transmitter and receiver with a standard

 Network cable.
- * Works with Cat5, Cat5e, Cat6, Ethernet cable.
- * Transmission distance up to 35-50M MAX (cat.6).
- * No software installation required.
- * Supports high HD digital resolution up to HDTV's480p/720i/720p/ 1080i/1080p
- Works with HDMI switch, HDMI splitter, and all kinds of HDMI/
 HDCP source and output Displays.
- * Housing: Metal and Aluminium


Limited Warranty:

IN NO EVENT THE DIRECT VENDOR'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, DIST, OR ITS DOCUMENTATION.

The direct vendor makes no warranty or representation, expressed, implied, or statutory with respect to the contents or use of this documentation, and specially disclaims its quality, performance, merchantability, or fitness for any particular purpose. The direct vendor also reserves the right to revise or update device or documentation without obligation to update. Device or documentation without obligation to update. For further inquires please contact your direct vendor.

HDMI Extender Over Cat. 8


User's Manual



Specifications:


	Transmitter			Receiver		
Model	HLT41	HLT21	HLT21E	HLR11	HLR11 E	HTR12
Input	HDMI connector x 1	HDMI connector x 1	HDM I connector x 1	RJ45 Jack x 1	RJ45 Jack x 1	RJ45 Jack x 1
Output	RJ45 Jack x 3 HDMI connector x 1	RJ45 Jack x 1 HDMI connector x 1	RJ45 Jack x 1 HDM I connector x 1	HDMI connector x 1	HDMI connector x 1	RJ45 Jack x 1 HDMI connector x 1
Bandwi dth	1.65 Gps					
Resolution	1920 x 1200 or 480p/720i/720p/1080i/1080p					
Operating temperature	0~45℃					
Storage temperature	-20℃~60℃					
Power Adaptor	DC 5V ,1A					
Housing	Metal and Aluminium					
Dimension(mm)	128(L) x 75. 5 (W) x 25(H) 77(L) x 64(W) x 25(H)					

HLT41 Introduction:




Number	Feature	Function	
1	Input Connector	HDMI Source	
2	LED	Power LED	
3	Power Jack	Power adaptor	
4	Output Connector	HDMI Sink	
5	Output Connector	RJ 45	

HLT21&HLR11 Introduction:




Number	Feature	Function
1	Power Jack	Power adaptor
2	Input Connector	HDMI Source
3	Output Connector	HDMI Sink
4	LED	Power LED
5	Output Connector	RJ 45
6	Input Connector	RJ 45

HLT21E&HLR11E Introduction:




Feature	Function
Power Jack	Power adaptor
Input Connector	HDMI Source
Output Connector	HDMI Sink
LED	Power LED
Output Connector	RJ 45
Input Connector	RJ 45
	Power Jack Input Connector Output Connector LED Output Connector

HTR12 Introduction:




Number	Feature	Function
1	Power Jack	Power adaptor
2	Input Connector	RJ 45
3	Output Connector	HDMI Sink
4	Output Connector	RJ 45
	LED	Power I ED


HLT21/E&HLR11/E Basic Application:



HLT21/E&HLR11/E Application for HDMI Splitter

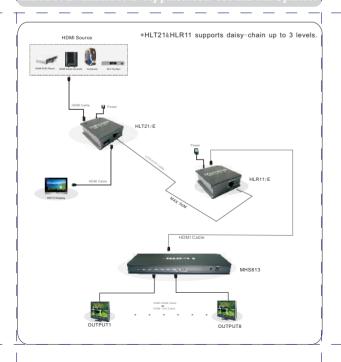

HLT41&HLR11 Application



HLT41&HTR12 Application

