

Front Panel


The front panel provides LED's for device status. Refer to the following table for the meaning of each feature.



Name	Status	Indication
POWER	Off	Power is off.
	On	Power is on.
ETH (LAN/WAN)	Off	There is no device linked to the corresponding port.
	On	There is a device linked to the corresponding port but there is no activity.
	Flashing	There is an activity device linked to the corresponding port.
WLAN	Off	The Wireless function is disabled.
	On	The Wireless function is enabled.
	Flashing	Data is received or sent through the Wireless.

Physical Interface

There are three physical interfaces on this Powerline Adapter.

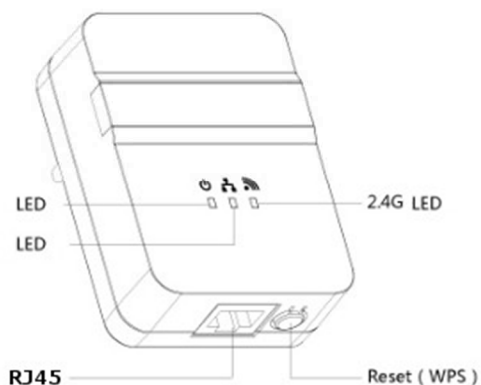

Interface	Description
Power Plug	A Power Plug for connecting the AP to a 100V~240V AC power socket.
Wired Port	A 10/100Mbps LAN/WAN Port for connecting the AP to the PC or the broadband device with a network cable.
Reset(WPS) Button	The Reset Button has two functions, WPS and Factory Default. When press it less than 2 seconds, it is WPS function, more than 5 seconds, the AP will restore to factory default.

